
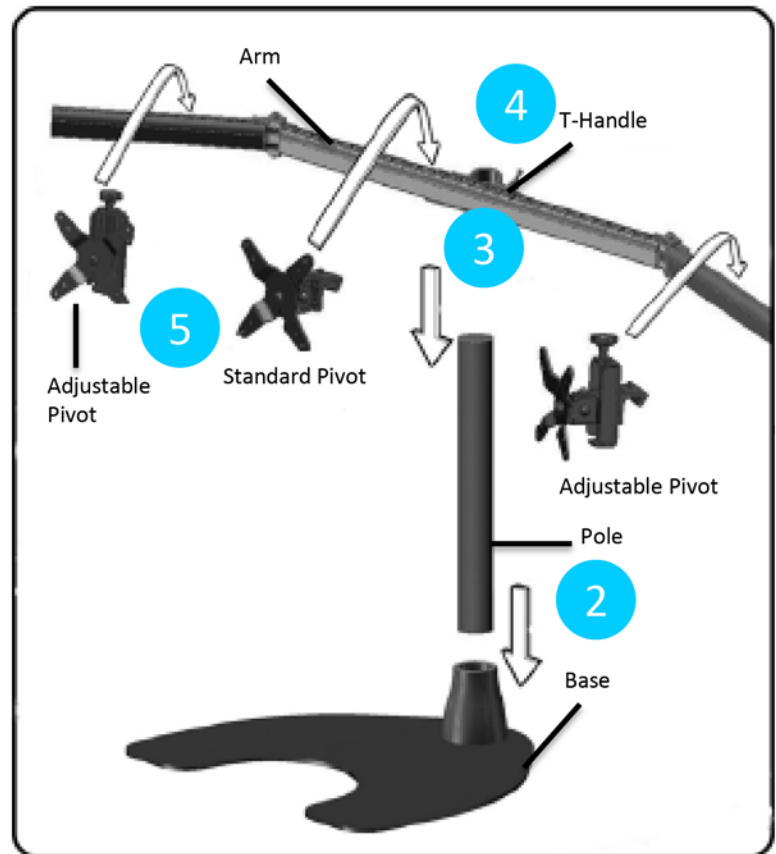


# Instructions 100-D16-B03-TW

## Installation:

1. Remove the base from the box and place on a flat surface.
2. Insert and screw the pole into the threaded screw in the cone. Tighten the set screw with the 3mm Allen key provided. Be certain the pole is fully seated and tightened into the cone and the set screw is securely tightened.
3. Place the arm assembly over the pole, making sure the grooves in the arms are facing up.
4. Choose desired height for the cross bar and tightened the T handle on the back of the pole clamp to hold the arm assembly securely on the pole.
5. With the silver release button facing towards the top of the monitor, attach the quick release pivot to the back of each monitor with the screws provided.
6. Starting with the center monitor (standard pivot), place each monitor on the horizontal bar by tipping it back approximately 45 degrees and then down until the silver release button engages the grooves and clicks into place. Repeat this process with the two lateral monitors (height adjustable pivots).
7. Turn the wing handle to loosen the telescoping wing. Slide telescoping in or out to accommodate your desired monitor positioning. Tighten handle to secure the telescoping wing in place.

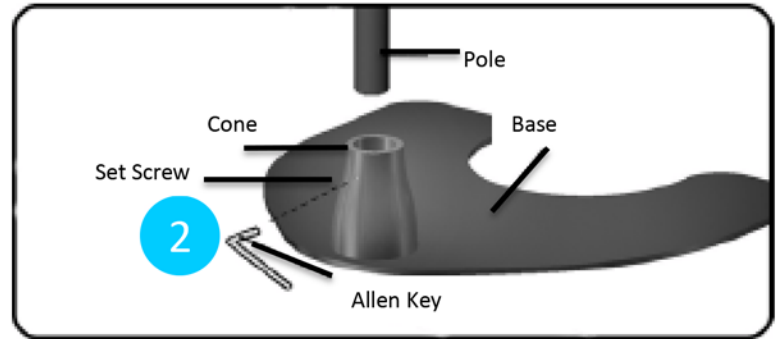

## Monitor Adjustment:

**Left/Right and Up/Down:** Grasp monitor with both hands and adjust to desired position. Note: pivots may be tight at first but with the weight of the monitor, the screen will tilt up, down, left and right.

**Tension Adjustment:** Tighten the 5mm bolt on the right side of the pivot with the Allen key provided.

**To tile monitors horizontally:** Establish desire height of the middle monitor. To adjust height of side monitors, turn the handle on the top of the adjustable pivot until the three monitors are properly aligned.

**To remove monitors from cross bar:** From the bottom: take the weight of the monitor in one hand and tip it back slightly while using the other hand to lift the top of the silver release button. Lift up and back-this motion will release the monitor from the stand.

## Telescoping Wings Adjustment:

